

TDK-Lambda CUS800M, 1000M and 1200M Series

3.3" x 6.7" 680W to 1200W AC-DC Power Supplies

<https://product.tdk.com/en/power/cus-m>
www.emea.lambda.tdk.com/cus800-1200m



Medical



Industrial



Test



LED



Broadcast



COMM



The very compact CUS800M, CUS1000M and CUS1200M AC-DC power supplies are packaged in a 1.67" (42.5mm) high package and can deliver up to 800W, 1000W and 1200W with efficiencies up to 95.5%. All models have medical (IEC 60601-1) and audio/video, information and communication technology equipment (IEC 62368-1) certifications. A variable speed fan, 5V 2A standby voltage, remote on/off, remote sense and a Power Good signal is standard.

Features

- Medical Certifications (2 x MOPP)
- $\leq 0.250\text{mA}$ Leakage Current
- Class B Conducted and Radiated EMI
- Compact 1.67" Height
- Variable Speed Cooling Fan

Benefits

- Generally required for B and BF Type Medical Equipment
- Simpler System Compliance
- Easier System EMC Compliance
- Space Saving in End Equipment
- Lower Audible Noise

Model Selector

Model	Nominal Output Voltage (V)	Output Adjustment (V)	Maximum Current (A)	Peak Current (A)	Maximum Power (W)	Maximum Peak Power (W)	Efficiency 115 / 230Vac (%)
CUS800M-12	12	11.7 - 12.6	56.7	66.7	680.4	800.4	90.8 / 92.5
CUS1000M-12	12	11.7 - 12.6	66.7	83.4	800.4	1000.8	92 / 93.6
CUS800M-24	24	23.4 - 25.9	33.4	-	801.6	-	92 / 94
CUS1000M-24	24	23.4 - 25.9	41.7	-	1000.8	-	93 / 95
CUS1200M-24	24	23.4 - 25.2	50.0	-	1200	-	92.5 / 95
CUS800M-36	36	35.1 - 38.8	22.2	-	799.2	-	92.5 / 94.6
CUS1000M-36	36	35.1 - 38.8	27.8	-	1000.8	-	93.3 / 95.3
CUS1200M-36	36	35.1 - 37.8	33.3	-	1198.8	-	93 / 95.5
CUS800M-48	48	46.8 - 51.8	16.7	-	801.6	-	92.2 / 94
CUS1000M-48	48	46.8 - 51.8	20.9	-	1003.2	-	93.5 / 95.5
CUS1200M-48	48	46.8 - 50.4	25.0	-	1200	-	93 / 95.5

CUS1000M

-

12

CUS800M (680 to 800W)
 CUS1000M (800 to 1000W)
 CUS1200M (1200W)

Output voltage
 12, 24, 36, 48
 (1200W: 24, 36, 48)

Specifications					
Model	CUS800M		CUS1000M		CUS1200M
Input					
Input Voltage Range (Operating)	Vac	85 - 265 (Derate linearly to 90% load from 90 to 85)			
Nominal Input Voltage Range	Vac	100 - 240 (Note: Safety certified for 90-264Vac only)			
Input Frequency	Hz	47 - 63			
Input Current at 115 / 230Vac	A	8.0 / 4.0	10.0 / 5.0	12.0 / 6.0	
Inrush Current at 115 / 230Vac (Cold Start)	A	25.0 / 50.0	25.0 / 50.0	30.0 / 50.0	
Leakage Current	uA	<250 at 265Vac 60Hz			
Touch Current (Enclosure Leakage)	uA	Not applicable			
Power Factor (115 / 230Vac)	-	0.99 / 0.95			
Harmonic Compliance	-	Meets IEC61000-3-2 Class A			
No Load Power Consumption	W	Typically <0.6W at 230Vac (Remote off and no load on 5Vsb). See evaluation data on website			
Hold Up Time (typ) at 115Vac Input	ms	11			
Efficiency	-	See model selector			
Conducted & Radiated EMI	-	EN55032, EN55011-B, FCC-B			
Immunity	-	Compliant with EN60601-1-2:2015 (Ed4), IEC61000-4.2, -3, -4, -5, -6, -8, -11			
Insulation Class	-	Class I			
Safety Certifications and Markings	-	IEC/EN/UL/CSA62368-1, IEC/EN/ES/CSA60601-1. CE Mark and UKCA Mark			

Immunity						
Test	Standard	Test Level	Criteria	Notes (The power stated below is total power (main output + standby output))		
				CUS800M	CUS1000M	CUS1200M
ESD	EN61000-4-2	1,2,3,4	A	-		
Radiated Susceptibility	EN61000-4-3	3	A	-		
Electrical Fast Transient Burst	EN61000-4-4	4	A	-		
Surge	EN61000-4-5	1,2,3,4	A	AC input power port		
Conducted Susceptibility	EN61000-4-6	3	A	-		
Magnetic fields	EN61000-4-8	4	A	-		
Voltage Dips and Input Interruptions	EN61000-4-11 Class 3 Industrial, incl EN55024 (100Vac)	0% for 1/2 cycle	A	A; < 330W, B; > 330W A; < 430W, B; > 330W	A; < 530W, B; > 530W A; < 400W, B; > 400W	A; ≤ 500W, B; > 500W A; ≤ 600W, B; > 600W
		0% for 1 cycle	A/B			
		40% for 10/12 cycles	A/B			
		70% for 25/30 cycles	A			
		80% for 250/300 cycles	A			
		0% for 250/300 cycles	B			
	EN61000-4-11 Class 3 Industrial, incl EN55024 (240Vac)	0% for 1/2 cycle	A	A; < 430W, B; > 430W	A; < 530W, B; > 530W	A; ≤ 600W, B; > 600W
		0% for 1 cycle	A/B			
		40% for 10/12 cycles	A			
		70% for 25/30 cycles	A			
		80% for 250/300 cycles	A			
		0% for 250/300 cycles	B			
	EN60601-1-2:2015 (100Vac)	0% for 1/2 cycle	A	A; < 430W, B; > 430W	A; < 530W, B; > 530W	
		0% for 1 cycle	A/B			
		70% for 25/30 cycles	A			
	EN60601-1-2:2015 (240Vac)	0% for 250/300 cycles	B	A; < 430W, B; > 430W	A; < 530W, B; > 530W	
0% for 1/2 cycle		A				
0% for 1 cycle		A/B				
		70% for 25/30 cycles	A			
		0% for 250/300 cycles	B			
SEMI F47 Line Dip	SEMI F47	-	-	At input voltages > 200Vac		

Specifications					
Model		CUS800M		CUS1000M	CUS1200M
Output					
Switching Frequency	kHz	Primary-secondary converter: LLC resonant 50k to 300kHz			
Line Regulation	mV	12V: 60, 24V: 120, 36V: 180, 48V: 240		24V: 120, 36V: 180, 48V: 240	
Load Regulation	mV	12V: 120, 24V: 240, 36V: 360, 48V: 480		24V: 240, 36V: 360, 48V: 480	
External Load Capacitance	uF	12 - 36V: 10,000, 48V: 7,000		24 - 36V: 10,000, 48V: 8,000	
Ripple & Noise	mV	12V: 240, 24V: 360, 36V: 480, 48V: 480		24V: 360, 36V: 480, 48V: 480	
Temperature Coefficient	%/°C	±0.02			
Minimum Load	-	No minimum load required			
Overcurrent Protection ⁽¹⁾	A	CUS800M: 12V: >70.1, 24V: >35.1, 36V: >23.4, 48V >17.6 CUS1000M: 12V: >87.6, 24V: >43.8, 36V: >29.2, 48V >22 CUS1200M: 24V:>52.5, 36V: >35.0, 48:>26.3			
Overvoltage Protection	-	CUS800M, CUS1000M: 12V: 13.8 - 16.2, 24V: 27.6 - 32.4, 36V: >41.4 - 48.6, 48V >55.2 - 64.8 CUS1200M: 24V: 27.6 - 32.4, 36V: >41.4 - 48.6, 48V >55.2 - 64.8			
Overtemperature Protection	-	Latching (unit shutdown), cycle AC input to reset			
Remote Sense	-	0.5V total compensation			
Remote On/Off	-	Opto-isolated. Inhibit: Low = ON, High = OFF			
Power Good	-	Combined AC Fail and DC OK opto isolated signal			
Standby Voltage	-	5V 2A			
Parallel Operation	-	Not possible			
Environmental					
Operating Temperature (-25°C start-up)	°C	-20 to +70, derate linearly to 60% load from 40 to 70 (CUS1200M-24:35 to 70)			
Storage Temperature	°C	-40 to +75			
Humidity (non condensing)	%RH	10 - 95. Operating and storage			
Cooling	-	Variable speed fan, air exits across output terminals. Typical 30dBA at 20% load, 42dBA at full load			
Altitude	m	5,000. Operating, transportation and storage			
Withstand Voltage (For 1 minute)	Vac	Input to Ground 2,000 (1xMOPP), Input to Output 4,000 (2xMOPP), Output to Ground 1,500 (1xMOPP)			
Isolation Resistance	MΩ	>100 at 25°C, 70%RH & 500Vdc			
Vibration (Non Operating)	-	10-55Hz (1 min sweep). Maximum 19.6m/s², 1 hour each			
Shock	-	<196m/s²			
Other					
Weight (Typ)	g	810	850	980	
Size (LxWxH)	mm	171 x 85 x 42.5	171 x 85 x 42.5	187 x 93 x 42.5	
Size (LxWxH)	Inches	6.73 x 3.35 x 1.67	6.73 x 3.35 x 1.67	7.36 x 3.66 x 1.67	
Connectors	-	Screw terminals. Signals: JST B8B PHDSS, Mating connector: PHDR-08VS			
MTBF - Telcordia SR-332 ⁽²⁾	Hours	452,227		742,196	
Warranty	yrs	5			

Notes:


See website for detailed specifications, test methods and installation manual

Specification parameters apply at 25°C ambient temperature unless otherwise stated.


(1) Hiccup with automatic recovery. If the output is shorted, an AC power reset may be required

(2) 24V full load, 115Vac input, 40°C

CUS800M and 1000M Outline Drawing

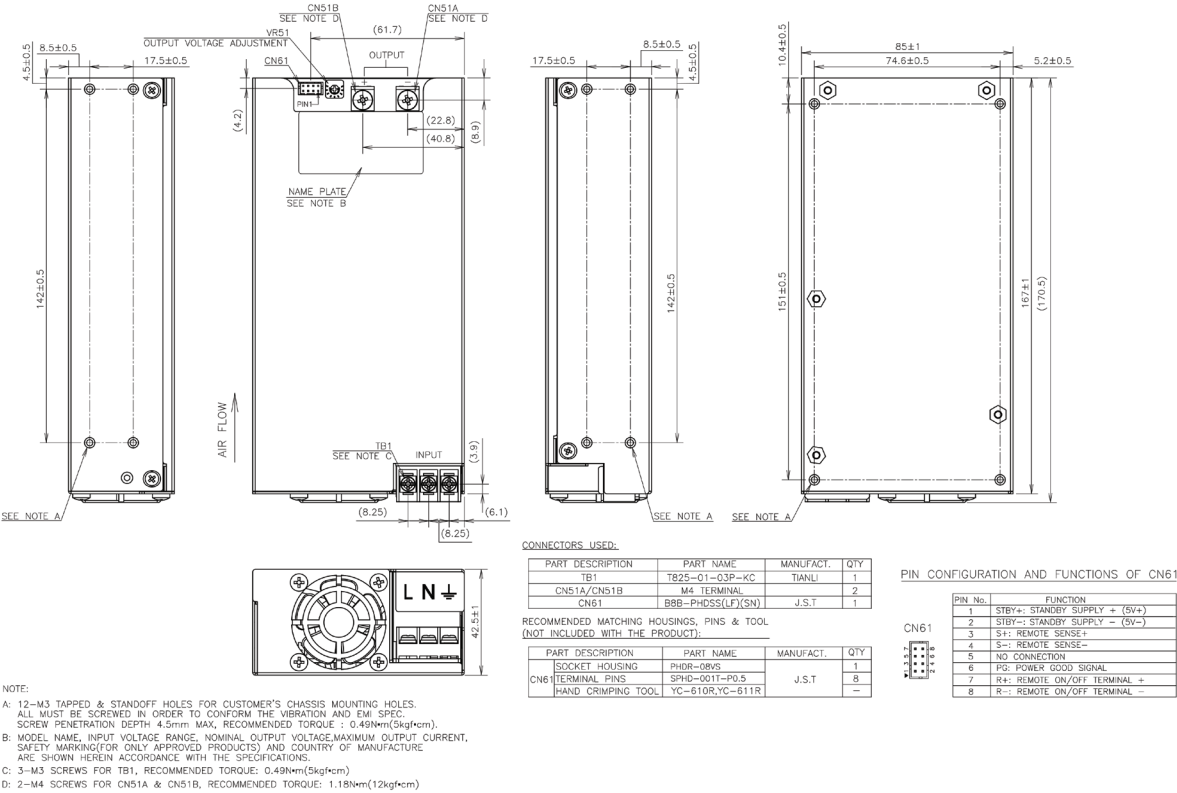

CUS1200M Outline Drawing

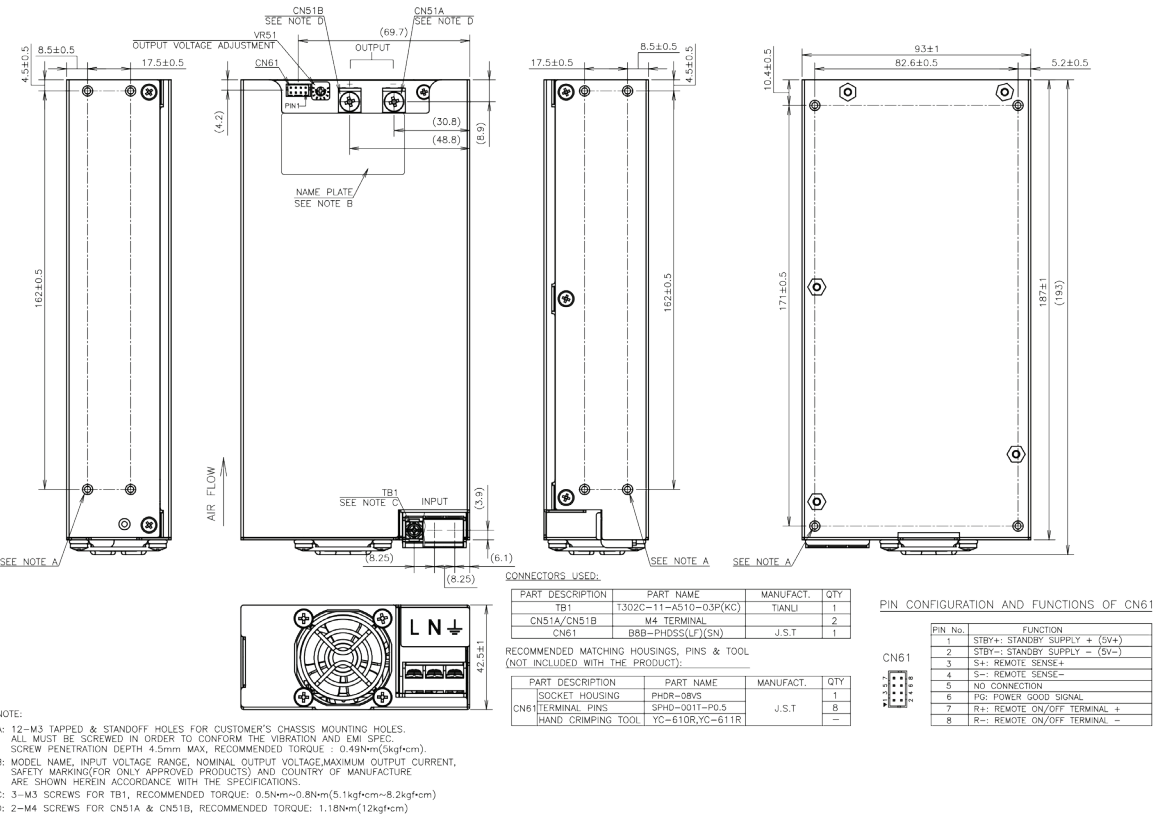



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
tlf.fr-powersolutions@tdk.com
www.emea.lambda.tdk.com/fr



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tia.powersolutions@tdk.com
www.us.lambda.tdk.com



Italy Sales Office

Tel: +39 02 61 29 38 63
tlf.it-powersolutions@tdk.com
www.emea.lambda.tdk.com/it



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



Netherlands

tlf.nl-powersolutions@tdk.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda Europe GmbH

Tel: +49 7841 666 0
tlg.powersolutions@tdk.com
www.emea.lambda.tdk.com/de



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
tlc.powersolutions@tdk.com
www.lambda.tdk.com.cn



Austria Sales Office

Tel: +43 2256 655 84
tlg.at-powersolutions@tdk.com
www.emea.lambda.tdk.com/at



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tts.marketing@tdk.com
www.sg.lambda.tdk.com



Switzerland Sales Office

Tel: +41 44 850 53 53
tlg.ch-powersolutions@tdk.com
www.emea.lambda.tdk.com/ch



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com



TDK-Lambda Europe GmbH

Tel: Tel. +45 3222 8086
tlg.dk-powersolutions@tdk.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
tlu.powersolutions@tdk.com
www.emea.lambda.tdk.com/uk

